

Rabbit 13

UNI EN 442 Δt 50° 75°/65°/20° - Δt 30° 55°/45°/20°




Kcal = Watt x 0.860
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.241
Watt Δt 40° = Watt Δt 50° x 0.768
Watt Δt 30° = Watt Δt 50° x 0.546
Watt Δt 20° = Watt Δt 50° x 0.338

p max = 10.0 bar

* = ON STOCK

Maximum order 5 pieces per item
Commande maximum 5 pièces par article
Maximalbestellung 5 Stück pro Artikel
Pedido máximo 5 piezas por artículo

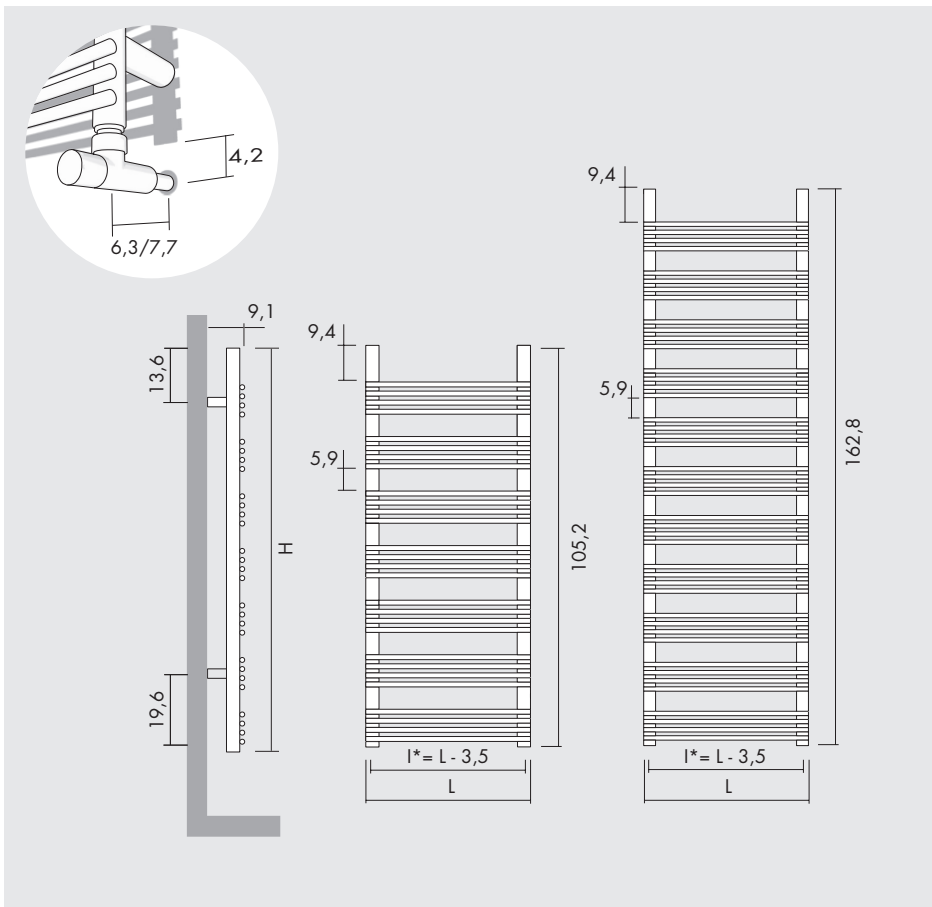


H cm	L cm	I* cm	art*	*	I*	watt Δt 30°	watt Δt 50°
105,2	43,5	40,0	RBT13043105	STOCK	2,8	266	487
105,2	48,5	45,0	RBT13048105	STOCK	3,0	306	560
162,8	43,5	40,0	RBT13043163	STOCK	4,4	418	766
162,8	48,5	45,0	RBT13048163	STOCK	4,6	480	880

[BASIC]* = BIAN BCOR NEOP


* = BCOR NEOP ON STOCK

Standard connection / Raccord standard /
Standard Anschluss / Conexión estándar

[A]



[AMD]



art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
L* = water content / volume d'eau / Wassergehalt / contenido de agua