


A* cm	inches	B* cm	inches	l* cm	inches	art*	L*	BTU Δt 50°	watt Δt 50°
acqua calda / hot water / eau chaude / warm Wasser / agua caliente									
70.0	27.6	81.0	31.9	5.0	2.0	SA00B	11.0	1 594	467
70.0	27.6	81.0	31.9	5.0	2.0	SA00R	11.0	1 116	327
70.0	27.6	81.0	31.9	5.0	2.0	SA00G	11.0	1 116	327
elettrico / electrical / électrique / elektrische / eléctrico									watt
66.0	26.0	81.0	31.9			SA00EB			750
66.0	26.0	81.0	31.9			SA00ER			750



Non è possibile installare valvole con interasse 5 cm AVC421_ AVC425_ The installation of 5cm pipe centres valves AVC421_ AVC425 is not possible L'installation de robinets pour entraxe à 5 cm AVC421_ AVC425 n'est pas possible Ted Es ist nicht möglich Ventile mit Achsstand 5 Cm AVC421_ AVC425_ installieren. No es possible instalar valvulas por conexión a 5 cm AVC421_ AVC425

art*
SOVACP0810SAG Sovrapprezzo portaserviette finitura oro / extra charge for towel bar in gold finishing / majoration pour port-serviettes en finition or / Zuschlag Handtuchhalter Gold / sobreprecio por toallero acabado oro

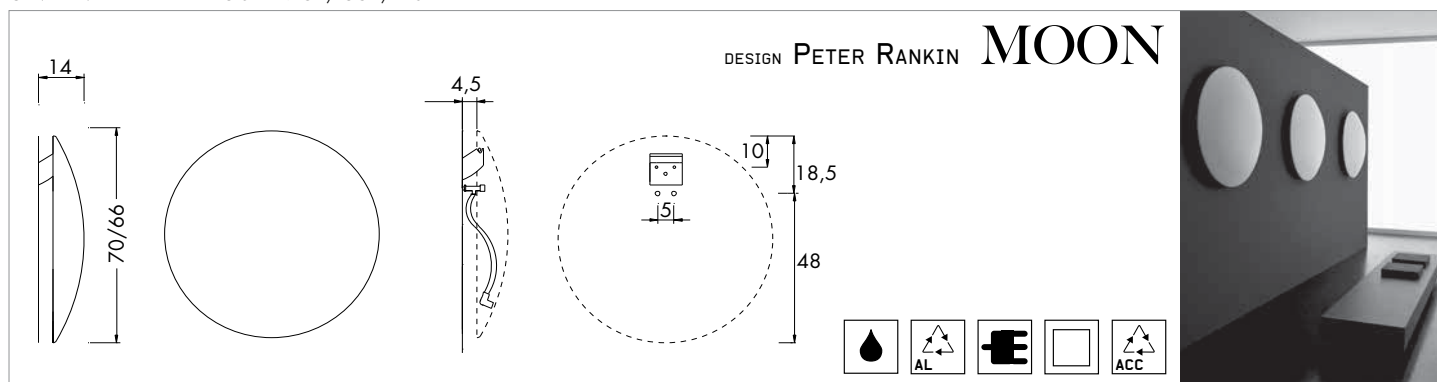

A* cm	inches	B* cm	inches	l* cm	inches	art*	L*	BTU Δt 50°	watt Δt 50°
acqua calda / hot water / eau chaude / warm Wasser / agua caliente									
70.0	27.6	70.0	27.6	5.0	2.0	MN00B	11.0	1 594	467
70.0	27.6	70.0	27.6	5.0	2.0	MN00R	11.0	1 116	327
70.0	27.6	70.0	27.6	5.0	2.0	MN00G	11.0	1 116	327
elettrico / electrical / électrique / elektrische / eléctrico									watt
66.0	26.0	66.0	26.0			MN00EB			750
66.0	26.0	66.0	26.0			MN00ER			750




Non è possibile installare valvole con interasse 5 cm AVC421_ AVC425_ The installation of 5cm pipe centres valves AVC421_ AVC425 is not possible L'installation de robinets pour entraxe à 5 cm AVC421_ AVC425 n'est pas possible Ted Es ist nicht möglich Ventile mit Achsstand 5 Cm AVC421_ AVC425_ installieren. No es possible instalar valvulas por conexión a 5 cm AVC421_ AVC425

art*
AVHCROM
 cronotermostato digitale per versione elettrica a radio frequenza / digital chronothermostat for electric version / chronotheostat digital pour version électrique avec radiofréquence / der digital Chronothermostat für elektrische Ausführung mit Radiofrequenz / cronotermostato digital para version electrica en radio frecuencia



art*
AVHRICC
 ricevitore per cronotermostato digitale / receiver for digital chronothermostat / receveur pour chronotheostat digital / digital Chronothermostat Empfänger / receptor para cronotermostato digital




A* = altezza / height / hauteur / Höhe / alto B* = larghezza / width / longueur / Breite / ancho art* = articolo / model / modèle / Artikel / artículo P* = pagina / page / page / Seite / página
 l* = interasse / pipe centres / distance entre depart et retour / Achsstand / distancia entre las conexiones
 L* = contenuto acqua / content / volume / Inhalt / volumen

Kcal = Watt x 0.860
 BTU = Watt x 3.413

 Watt Δt 60° = Watt Δt 50° x 1.253
 Watt Δt 40° = Watt Δt 50° x 0.759
 Watt Δt 30° = Watt Δt 50° x 0.531
 Watt Δt 20° = Watt Δt 50° x 0.322

 p max = 3.0 bar

Colori / colours / couleurs / Farbe / colores
 [BIAN] B standard
 T + 10%
 S + 20%
 [RAL] S + 20% RAL non inclusi in tabella / special Ral colours / couleurs Ral spéciales / RAL Farbe nicht in der Tabelle inbegriffen / colores RAL especiales

 Cromo spazzolato / brushed chrome / chrome brossé / gebürstet Chrome / cromo cepillado.
 Oro spazzolato / brushed gold / doré brossé / gebürstet Gold oro cepillado.
 Cromo / chrome / chrome / Chrome / cromo.

Ulteriori dettagli
 Further details
 Ulérieures détails
 Weitere Einzelheiten
 Otros detalles


 P* 120